


Installation

Before your Sensata INSIGHTS camera installation, ensure your vehicle's windshield is **dry**. Installations in damp conditions risk inadequate camera adhesion to the window. Many factors, such as your breath, can compromise your 3M[™] VHB[™] tape's connection to the windshield, so please exert caution during the application process.


1. If there's moisture on the windshield, **turn on** vehicle defrosters to warm and dry the windshield.
2. Ensure there are no chips or cracks in the windshield. If the windshield is compromised, device application may cause chips or cracks to spread.
3. **Clean** the windshield with your alcohol wipe. Allow time to dry.
4. **Remove** any film left over from the solution.
5. **Remove** the plastic from the tape on the mounting bracket.
6. **Apply** your camera to the windshield.
7. Go outside the vehicle and check whether **80%–90%** of the tape's surface area connects with the glass.

By following the steps above, you'll be able to successfully mount various INSIGHTS camera models on your vehicle's windshield.

Installer Note: If you don't see proper adhesion, **apply pressure** to areas where the tape doesn't connect with the glass.

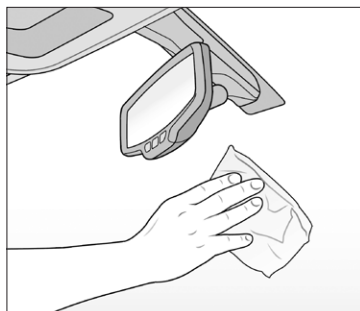

Be sure to use the included alcohol wipe to clean your windshield.

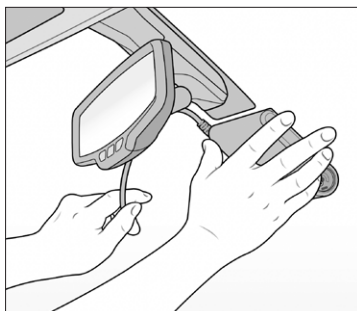

Firmly apply the camera to your windshield as shown.